

CURB STOP/SWING CHECK VALVES

316 STAINLESS STEEL

DESCRIPTION

316 Stainless Steel Curb Stop / Swing Check FIPT Assemblies for PE/PVC pressure piping applications.

TUBE

- IPS(OD) For use on HDPE Pipe SDR 7.3 thru SDR 17 (Sizes 1-1/4" - 2" with Cepex Male Adapters)
For use on Sch 40/80 PVC Pipe with SS Gripper Ring (Sizes 1-1/4" - 2" with Cepex Male Adapters)
- CTS(OD) For use on Certified PE Pipe SDR 9 & SDR 11 (Sizes 1-1/4" - 2" with Cepex Male Adapters)
For use on Cross Linked Pipe PE SDR 9 for Cold Water Only. (Sizes 1-1/4" - 2" with Cepex Male Adapters)

WORKING PRESSURE

At 73° F (23° C) 1-1/4" - 2" rated to 200 PSI

FEATURES

- Female NPT threaded for easy adaptation to IPS/CTS polyethylene & PVC Pipe with Cepex Male Adapters
- 316 Stainless Steel Construction
- Compact one piece design with curb stop, clean out and check valve
- Fully Serviceable Check Valve with vertical service port



1-1/4" SS Curb Stop / Swing Check Valve FNPT

APPLICATIONS

Low Pressure Sewer

PARTS - CURB STOPS

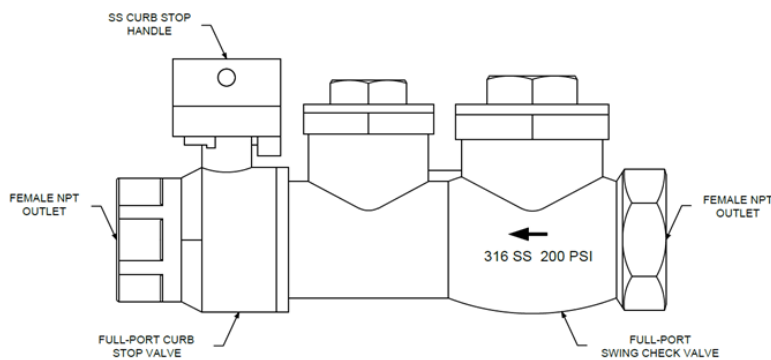


FIG.	Material	Description
1	316 SS	Curb Stop
2	316 SS	Swing Check
3	PTFE	Seats
4	RPTFE	Valve Stem Packing