

SWING CHECK VALVES

PP ENDS/PVC BODY
PP ENDS/316 SS BODY

DESCRIPTION

PVC or 316 SS Swing Check Valves for PE/PVC pressure piping applications.

TUBE

IPS(OD) For use on HDPE Pipe SDR 7.3 thru SDR 17 (Sizes 1-1/4" - 2")
For use on Sch 40/80 PVC Pipe with SS Gripper Ring (Sizes 1-1/4" - 2")

CTS(OD) For use on Certified PE Pipe SDR 9 & SDR 11 (Sizes 1-1/4" - 2")
For use on Cross Linked Pipe PE SDR 9 for Cold Water Only. (Sizes 1-1/4" - 2")

WORKING PRESSURE

PVC Check Valve at 73° F (23° C) 1-1/4" - 2" rated to 125 PSI
316 SS Check Valve at 73° F (23° C) 1-1/4" - 2 "rated to 200 PSI

FEATURES


Compression (IPS & CTS) end connectors available
Check Valves available in PVC or 316 SS
No Inserts Required
Fully Serviceable
EPDM O-Rings
Color coded
Pre-assembled prior to leaving factory
ISO 9001 certified

APPLICATIONS

Low Pressure Sewer
Many Other Uses



1-1/4" IPS PVC SWING CHECK

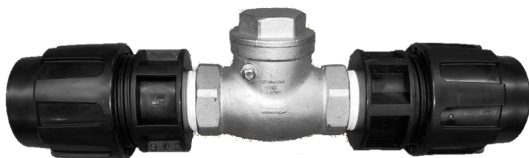

1-1/2" IPS SS SWING CHECK