

Curb Stop Valves

Performance™ Series

Description

- Polypropylene Curb Stops for PE pressure piping applications.

Tube

- IPS (OD)
 - For use on HDPE Pipe SDR 7.3 thru SDR 17. Sizes 1-1/4", 1-1/2" & 2"
 - For use on Sch 40/80 PVC Pipe with SS Gripper Ring. Sizes 1-1/4", 1-1/2" & 2"
- CTS (OD)
 - For use on Certified PE Pipe SDR 9 & SDR 11. Sizes 1-1/4", 1-1/2" & 2"
 - For use on Cross Linked Pipe PE SDR 9 for Cold Water Only. Sizes 1-1/4", 1-1/2" & 2"

Working pressure

- Pressure rating: 200 PSI @ 73° F (23° C)

Features


- Compression (IPS & CTS) & Threaded (Female) end connectors available.
- Fast and easy operation in small spaces.
- Inbuilt torque overload protection (ratcheting handle).
- Fully serviceable.
- EPDM O-Rings.
- 100% hydro tested prior to leaving the factory.
- Extremely smooth handle operation.
- Insert-less design.
- Color coded.
- UV stabilized.
- Extensively used worldwide.
- ISO 9001 certified.

Applications

- Water distribution
- Reclaim water
- Industrial
- Leachate Collection
- Irrigation
- Many other uses



Curb Stops Pressure Loss

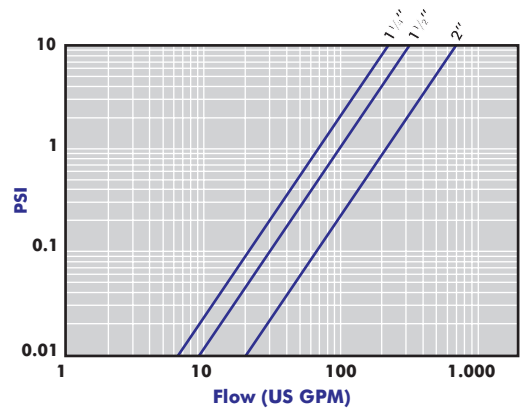

Parts

N°	Description	Material	N° Req.
1	Nut	PP	2
2	Split Ring	POM	2
3	Pipe Guide	PP	2
4	O-Ring	EPDM	2
5	Valve Nut	PP	2
6	End Connector O-Ring	EPDM	2
7	Body	PP	1
8	Seat	PE	2
9	Stem	PVC	1
10	Fastening Screw	Stainless Steel	1
11	Handle Inner	POM	1
12	Handle Outer	POM	1
13	Ball	PVC	1

